



LEDI 1/S

With remote display

Hours, minutes & seconds 7 segments LED display



- Height of the digits : 14.2 mm
- Reading distance : 7 meters
- 12H or 24H format available
- SNMP (NTP version)
- Time and date displayed alternately
- Brightness control
- AFNOR NFS 87500 or NTP/SNTP synchronisation input

Built-in Lithium battery provides backup of time information in case of power cut for **10 years**.

- Power supply: AC : 230VAC/50-60HZ, class 1.
- Power supply: DC : 18 to 36 VDC or 36 to 72 VDC
- Power of Ethernet (POE)


- Electrical Consumption :
 - Afnor NFS 87500 : 3VA
 - NTP/SNTP : 5VA
- Operating T° : 0° / 70°C
- Storage T° : -20° / 85°C

Aluminium case.

- Display unit: L160 x H44 x D26mm.
Weight: 0.180 kg
- Command unit: L180 x H44 x D146mm.
Weight: 0.720 kg
- Connection cable: Shielded cable HD XGA DB15 male/male
Length: 1.8m

Standards : Safety (EN60950), EMC (EN55024 & EN55022)

		PART NUMBER					
		92143	/	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
SYNCHRONISATION INPUT				↑			
AFNOR NFS 87500	■	8					
NTP (RJ45)	■	N					
POWER SUPPLY							
230VAC/50-60Hz	■	0					
18 to 36 VDC	■	5					
36 to 72 VDC	■	9					
PoE (IEEE 802.3af)	■	7					
FRONT PANEL – Display unit							
Standard : 1U x 160mm	■				2		
Specific – on request	■				x		

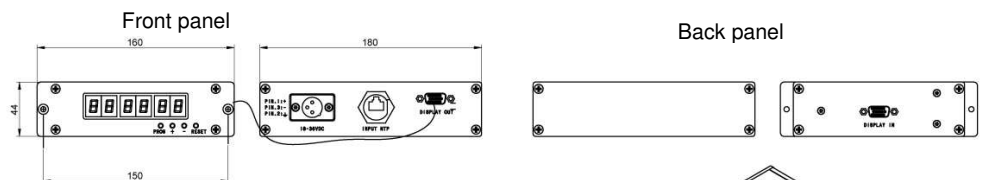

LEDI 1/S, NTP input, 18-36vdc power supply

