


GT SCADA - Überwachungssoftware CDG030

Die **Überwachungssoftware CDG030** kann in Echtzeit alle Gorgy Timing Produkte verwalten. Sie überwacht die Leistung des Systems via SNMP und erstellt eine Log-Datei aller Fehlermeldungen.
Kompatibel mit : Windows® XP / 2003 / Vista (32 bits) / Windows 7 / Windows 8.

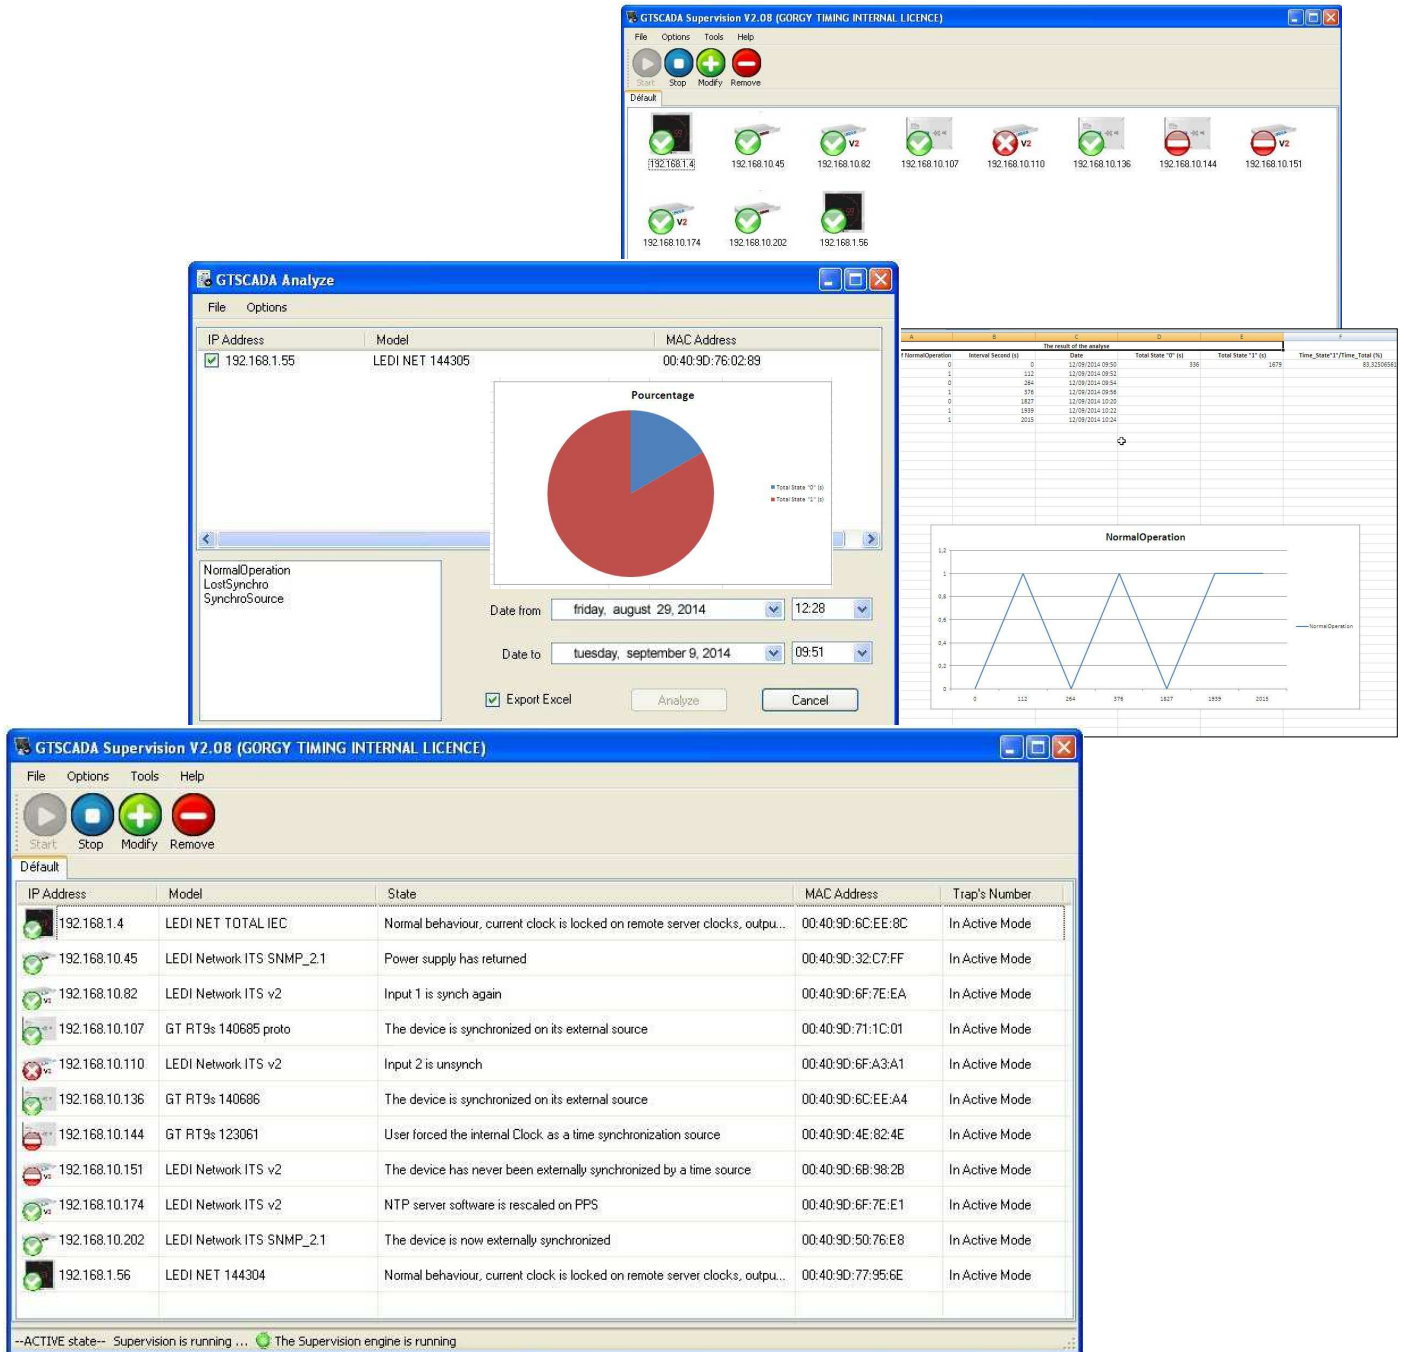

The screenshot displays the GTSCADA software interface, which includes a main monitoring window, an analysis tool, and a detailed device status table.

GTSCADA Analyze window details:

- IP Address: 192.168.1.55
- Model: LEDI NET 144305
- MAC Address: 00:40:9D:76:02:89
- Percentage chart showing NormalOperation (red) and LostSynchro (blue).
- Date range: Friday, August 29, 2014 to Tuesday, September 9, 2014.
- Export Excel button available.

GTSCADA Supervision V2.08 window details:

IP Address	Model	State	MAC Address	Trap's Number
192.168.1.4	LEDI NET TOTAL IEC	Normal behaviour, current clock is locked on remote server clocks, output...	00:40:9D:6C:EE:8C	In Active Mode
192.168.10.45	LEDI Network ITS SNMP_2,1	Power supply has returned	00:40:9D:32:C7:FF	In Active Mode
192.168.10.82	LEDI Network ITS v2	Input 1 is synch again	00:40:9D:6F:7E:EA	In Active Mode
192.168.10.107	GT RT9s 140685 proto	The device is synchronized on its external source	00:40:9D:71:1C:01	In Active Mode
192.168.10.110	LEDI Network ITS v2	Input 2 is unsynch	00:40:9D:6F:A3:A1	In Active Mode
192.168.10.136	GT RT9s 140686	The device is synchronized on its external source	00:40:9D:6C:EE:A4	In Active Mode
192.168.10.144	GT RT9s 123061	User forced the internal Clock as a time synchronization source	00:40:9D:4E:82:4E	In Active Mode
192.168.10.151	LEDI Network ITS v2	The device has never been externally synchronized by a time source	00:40:9D:68:98:2B	In Active Mode
192.168.10.174	LEDI Network ITS v2	NTP server software is rescaled on PPS	00:40:9D:6F:7E:E1	In Active Mode
192.168.10.202	LEDI Network ITS SNMP_2,1	The device is now externally synchronized	00:40:9D:50:76:E8	In Active Mode
192.168.1.56	LEDI NET 144304	Normal behaviour, current clock is locked on remote server clocks, output...	00:40:9D:77:95:6E	In Active Mode

ARTIKELNUMMER

OPTIONEN EINGANG

Windows® XP / 2003 / Vista (32 bits) / Windows 7 /
Windows 8. Englisch, Französisch oder Chinesisch.

C D G 0 3 0

