

LEDI® WORLD REVERSO 5.60

Indoor / Double face



Set of 2, 3, 4, 5, 6, or 7 LEDI® 5.60 digital clocks in the original GORGY TIMING design displaying the local times of different cities around the world

Names of cities written in white letters below each zone.
(City names to be specified when ordering)
Manual programming of the time shift and seasonal time changes of the different depending on the version.
Legibility 25 metres



Time setting

The professional LEDI® clocks can display the same time information, synchronized by a master clock or a time server.

Internal time base

The LEDI® clock has its own temperature compensated TCXO time base which allows an accuracy about 0.1 sec / day between 0° to 40°C in case of synchronization loss.

Security

Backup of time information in case of mains absence, by lithium battery: 10 years.

Specifications

Power supply (following version)	230VAC 50/60Hz 115VAC 50/60Hz Version NTP : PoE (Power over Ethernet)
Certifications	CE, EN 62368, EN 55032, EN 55035, ROHS
Maximum consumption	35 VA
IP	30
MTBF	46 267 h
MTTR	Display: 5 min CPU: 5 min Power supply: 5 min
Weight	Depending on model
Dimension	See table item code
Digit height	Hour/minute: 50 mm Wave of seconds: 60 points
Maximal distance of legibility	25 meters
Operating temperature	-20° to 50°C
Electrical equipment classification	⚡ Class 1 (in 115 or 230 VAC) ⚡ Class 3 (in PoE)

Key features

- Perfectly silent, direct and accurate reading of time.
- SMD bi-colour LED technology allows to change the display colour in red, green or yellow (optional white or blue)
- The patented technology of the light guide provides a perfect regularity of the brightness and viewing angle at 160°
- The front face of the LEDI® is coated with an antiglare and anti-scratch film giving an extraordinary 60000 : 1 level of contrast.
- A protection against over-voltage and industrial interference via EMC filter
- An easy "plug and play" installation
- An anodized aluminium case
- Double face IP30 on bracket
- Its participation in the sustainable development life span over 20 years.
- 2 years warranty
- Up to 10 brightness levels for optimal viewing
- Remote and batch configuration via the optional "remote configuration" software
- Selection of colours (independently between wave and numbers) and brightness
- Behaviour of central dots (fixed, blinking...)

NTP Version

- Synchronisation of up to 4 NTPv4 servers and setting of advanced NTP options (poll rate / burst / preference order)
- Time zone selection and automatic summer/winter time change
- Supervision by SNMP v1, v2c, v3, SYSLOG, Consultation of event logs
- Configurations accessible via http and/or https
- Possibility of changing the display colour according to events (e.g. a loss of synchronisation changes the display colour to red)
- IPv4 / IPv6 protocols
- 12h or 24h Mmode

Display / LED characteristics

Single row LED display, SMD technology, reading angle: 160°

bi-colour (red, green) LED		Monochrome LED
• Red: 245 mcd	• Yellow	• Blue: 625 mcd
• Green: 780 mcd		• White: 625 mcd

Synchronisation inputs


- DCF77 (EUROPE) with antenna
- GPS
- AFNOR NFS 87500 or IRIG B (to specify at purchase order)
- NTP Ethernet 10/100BaseT
- NTP Wi-Fi (IEEE 802.11 a/b/g/n standards 2.4 Ghz)

Storage conditions

Conditions	Temperature	Hygrometry	Maximum cumulative duration
Extreme	-20°C to 10°C	10 to 85% HR	48h
Extreme	40°C to 70°C	10 to 85% HR	48h
Normal	10°C to 40°C	10 to 85% HR	6 months

The product must be switched on for 4 hours every 3 months to maintain its characteristics*.

*see user guide for more information

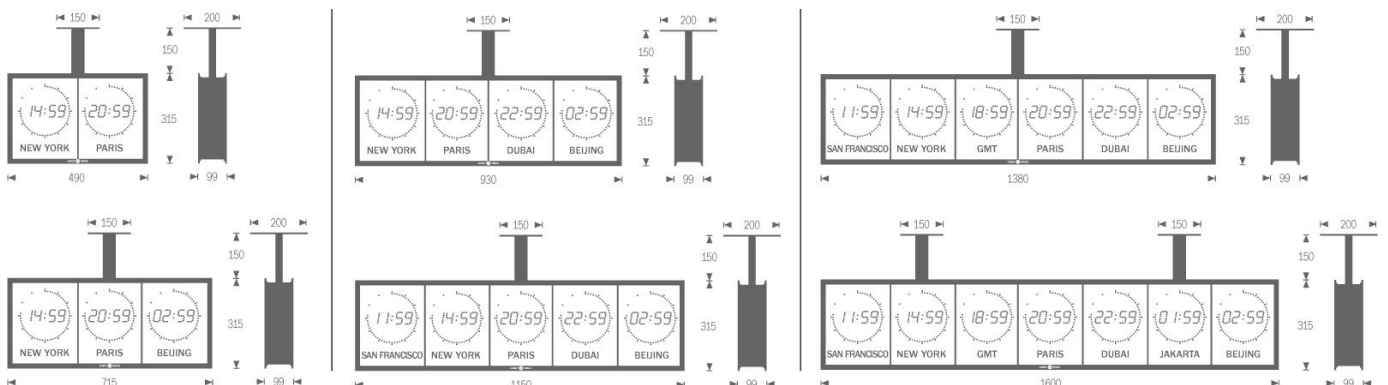


LEDI® WORLD REVERSO 5.60 Indoor / Double face

		ITEM CODE							
		ND54	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
		↑	↑	↑	↑	↑	↑	↑	↑
(1) Number of time zones									
(2) 2 Time zones: Dimensions: L490 x H315 x P62 mm	<input type="checkbox"/>	2							
(2) 3 Time zones: Dimensions: L715 x H315 x P62 mm	<input type="checkbox"/>	3							
(2) 4 Time zones: Dimensions: L930 x H315 x P62 mm	<input type="checkbox"/>	4							
(2) 5 Time zones: Dimensions: L1150 x H315 x P62 mm	<input type="checkbox"/>	5							
6 Time zones: Dimensions: L1380 x H315 x P62 mm	<input type="checkbox"/>	6							
7 Time zones: Dimensions: L1600 x H315 x P62 mm	<input type="checkbox"/>	7							
(1) 7 maximum time zones									
VERSION									
DCF Radiosynchronisation. DCF Antenna + 4m cable	<input type="checkbox"/>	D							
GPS Radiosynchronisation. GPS Antenna + 10m cable	<input type="checkbox"/>	G							
(2) AFNOR NFS 87500 Receiver UTC	<input type="checkbox"/>	8							
NTP Ethernet Synchronisation 10/100 base T	<input type="checkbox"/>	K							
NTP Wi-Fi Synchronisation (IEEE 802.11 a/b/g/n standard 2,4 Ghz)	<input type="checkbox"/>	W							
(3) If IRIG.B. version, please specify as a note on your order									
PROGRAMMABLE LED									
Selectable colour, red, yellow, green	<input type="checkbox"/>	1							
Selectable colour white or blue	<input type="checkbox"/>	5							
MOUNTING									
Ceiling bracket	<input type="checkbox"/>	P							
COLOUR CASING									
Grey anodised aluminium	<input type="checkbox"/>	7							
(2) Black anodised aluminium	<input type="checkbox"/>	0							
(2) Colours unavailable above 5 time zones									
POWER SUPPLY									
Standard: 230VAC 50/60Hz	<input type="checkbox"/>	0							
115VAC 50/60Hz	<input type="checkbox"/>	1							
Power over Ethernet (PoE - IEEE802.3af) 1 cable for 2 time zones (<i>version K</i>)	<input type="checkbox"/>	7							
Power over Ethernet (PoE - IEEE802.3af) 2 câbles for 3 to 5 time zones (<i>version K</i>)	<input type="checkbox"/>	8							
Power over Ethernet (PoE - IEEE802.3af) 2 câbles for 6 to 7 time zones (<i>version K</i>)	<input type="checkbox"/>	9							
TIME ZONE NAMES									
(3) Permanent names and identical on both sides	<input type="checkbox"/>								S
Magnetic removable plates + (3) Permanent names and identical on both sides	<input type="checkbox"/>								G
Magnetic removable plates without names (erasable coating)	<input type="checkbox"/>								P
(3) Names of the time zones to be specified when ordering in the configuration file at the end of the document									
OPTIONS									
Tropicalization	<input type="checkbox"/>								U

LEDI®WORLD – TIME ZONE NAMES

- Names will be in capitals letter of 20mm (LEDI®WORLD 5.60) and 35mm (LEDI®WORLD 7), White following the ITC Franklin Gothic medium font
- Pay attention of spelling
- Pay attention to the order, we will use exactly what you indicate below.

Find the updated list of spindle names on our website (Others on request)

N° of order:		Example				
Company Name:		Time zone n°1	Time zone n°2	Time zone n°3	...	
Date:						
Contact/ signature	Stamp for validation					
CLOCK 1						
Time zone n°1	Time zone n°2	Time zone n°3	Time zone n°4	Time zone n°5	Time zone n°6	Time zone n°7
CLOCK 2						
Time zone n°1	Time zone n°2	Time zone n°3	Time zone n°4	Time zone n°5	Time zone n°6	Time zone n°7
CLOCK 3						
Time zone n°1	Time zone n°2	Time zone n°3	Time zone n°4	Time zone n°5	Time zone n°6	Time zone n°7